


DEVICE CONFIGURATION & ACCESSORIES

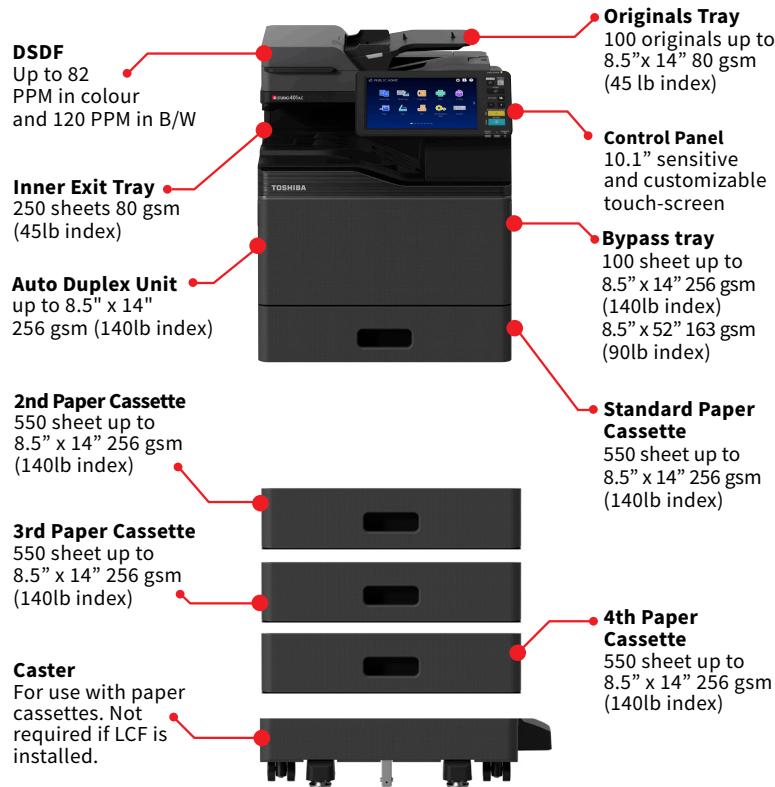

Envelope printing is available from bypass, standard cassette and optional cassettes (not the LCF)

Accessories (Options)

Additional Paper Options

Paper Feed Unit (550 sheets)
Large Capacity Feeder (2,000 sheets)
Spacer
Offline Stapler

MY-1050
KD-1071
GR-1380
MJ-1047

Connectivity/Security Options

Wireless LAN/Bluetooth
Fax Unit (one line only)
Multi-Station Print Enabler
Meta Scan Enabler
IPSec Enabler
Unicode Font Enabler
Hardcopy Security Printing
Monotype Font Enabler
Harness Kit for Coin Controller
Security SSD (512GB BISS*)

GN-4030
GD-1370NA-N
GS-1090Node
GS-1010Node
GP-1080Node
GS-1007Node
GP-1190Node
GB-2050L
GQ-1280-N
GE-1370

Miscellaneous Options

Stand
Caster

ST-400AC
GR-1390

e-BRIDGE Plus Apps

Microsoft 365[®] MFP Apps Bundle
Includes:
- OneDrive[®] 365 App
- Exchange[®] 365 App
- SharePoint[®] 365 App


GB-365Node

G-Suite™ MFP Apps Bundle

Includes:
- Gmail for G-Suite™ App
- Google Drive™ for G-Suite™ App

GB-G-SuiteNode

* BISS (Bidirectional Serial Synchronous)

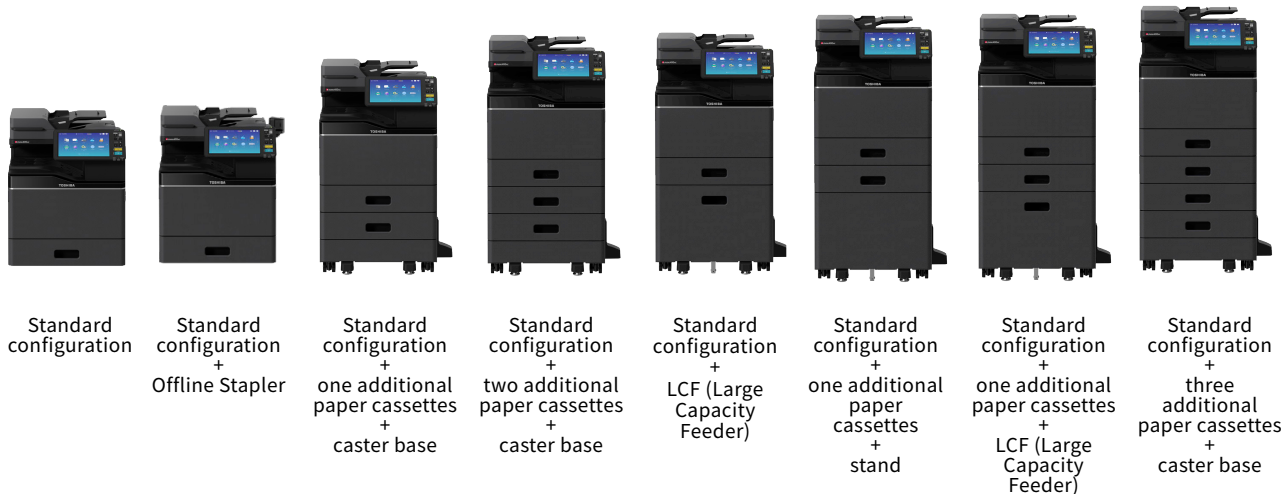

SPECS SHEET

e-STUDIO331Ac/401Ac

Main Specifications

Copy System	Indirect Electrostatic Photographic Method/OPC/LED. Heat Roller Fusing
Display	10.1" Colour WSVGA Touch Screen Tilting Display
Copy Speed	35/42 PPM (LT)
First Copy Out	Colour: 7.2/5.7 seconds (300dpi Scan) Monochrome: 6.3/5.1 seconds (300dpi Scan)
Warm-Up Time	Approximately 20 Seconds
Copy Resolution	600 x 600 dpi
Stack Feed Bypass	3.9" x 5.8" to 8.5" x 14", 8.5" x 52" Banner, Envelope
Multiple Copying	Up to 999 Copies
Paper Capacity	Standard 650 Sheets/Maximum 3,200 Sheets
Original Feed	Standard 100-Sheet DSDf
Scan Speed & Weights	Monochrome: 60/120 SPM. Colour: 41/82 SPM (300dpi), 21/42 SPM (400dpi, 600dpi) 35-105 gsm
Scan Format	JPEG, TIFF-Multi/Single Page, PDF-Multi/Single Page, Slim PDF-Multi/Single Page, XPS-Multi/Single Page, Searchable PDF-Multi/Single Page, Searchable PDF/A-Multi/Single Page, DOCX-Multi/Single Page, XLSX-Multi/Single Page, PPTX-Multi/Single Page
Max. Original Size	LG (8.5" x 14")
Paper Feed Sizes	Drawer 1: 550 Sheets-ST-R to LG, Bypass: 100 Sheets-3.9" x 5.8" to 8.5" x 14", 8.5" x 52" Banner, Optional Drawer 2, 3, 4: 550 Sheets-ST-R to LG Standard, "cassettes 1, 2, 3, and 4 support envelopes (Approximately 60)", Optional 2,000-Sheet LCF LT and LG (no envelopes)
Paper Weights	All Drawers: 16 lb Bond-140 lb index Bypass: 100 Sheets-14 lb Bond-140 lb index, Opt. 2,000-Sheet LCF (pedestal type)-17 lb-140 lb index
Duplex	Standard Automatic Duplex Unit
Reproduction Ratio	25% to 400%
Max Duty Cycle	Max. 60K/60K Month (Colour: 100%)
Weight	Approximately 99 lb *
Approx. Dimensions	20.47" (W) x 21.25" (D) x 24.96" (H) **
CMYK Toner Yield	K: 18.4 / CMY: 17.4K @ 5%
Power Source	120 Volts, 50/60 Hz, 12 Amps
Power Consumption	Maximum 1.5kW (120V)
CPU	Intel E3930 1.3GHz(Dual Core)
Memory	4GB
Hard Disk Drive	256 SSD GB Self-Encrypting Drive

e-BRIDGE Next Print Specifications

Print Speed	35/42 Pages Per Minute (LT)
Print Resolution	600 x 600 dpi (3 bit), 1,200 x 1,200 dpi (1 bit - PS Only)
Operating Systems	Windows Server® 2016, 2019, 2022, Windows® 11 (with/without ARM), Macintosh® (macOS X 10.7.4, 10.8, 10.9, 10.10, 10.11, 10.12, 10.13, 10.14, 10.15), Unix®, Linux®
Network Protocols	TCP/IP (IPv4, IPv6), NetBIOS over TCP/IP, IPX/SPX® for Novell® Environments, EtherTalk for Macintosh® Environments
Printing Protocols	SMB (v1, v2, v3), LPR/LPD, IPP (TLS 1.2/1.3) w/Authentication, Port 9100 (Bi-Directional), WS Print (TLS 1.2/1.3), FTP (TLS 1.2/1.3)
Print Drivers	Windows Server® 2016/2019/2022, Windows® 11, macOS X 10.12, 10.13, 10.14, 10.15, 11, 12, 13, 14, 15
Interface	RJ-45 Ethernet (10/100/1000 Base-T), USB 2.0 (High-speed) Optional IEEE802.11b/g/n, Wireless LAN, Optional Bluetooth
Wireless Device	AirPrint®, Mopria®, e-BRIDGE Print & Capture Application on iOS and Android (Available via Apple® App Store or Google Play)
Device Management	TopAccess
Account Control	Up to 10,000 users or 1,000 Departments Supports User Authentication (on Device), Login Name/Password (via Windows® domain) or Login Name/Password (via LDAP Server) for Copy, Print, Scan, Fax, List, and User Function
Accessibility Features	VNC Support, Tilt Front Panel, Job Programs, Universal Grip for Paper Trays, Disable Screen Timeout and Audible Beep Message Alerts

e-Filing Specifications

Operation Method	Colour Touch Screen Control Panel or Client PC
Number of Boxes	1 Public Box, 200 Private User Boxes
Capacity of Boxes	100 Folders Per Box, 400 Documents Per Folder/Box, 200 Pages Per Document



* Without toner cartridge and imaging unit
 ** Height at the original glass

Designs and specifications subject to change without notice. Specifications may vary by conditions of use and/or environmental usage. For best results and reliable performance, always use supplies manufactured or designated by Toshiba. Not all options and accessories may be available at the time of product launch. Please contact a local Authorized Toshiba Dealer or a Toshiba Tec Canada Business Solutions Inc. Branch for availability. Toner yields are estimates based on 5% coverage, letter-size page. Driver and connectivity feature support varies by client/network operating system. Product names may be trademarks of their respective companies. AirPrint® and the AirPrint® logo are trademarks of Apple Inc. This is a Class 1 laser product complying with IEC60825-1. All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.

© 2025 Toshiba Tec Canada Business Solutions Inc.

Facsimile Specifications

Compatibility	Super G3
Data Compression	MH/MR/MMR/JBIG
Transmission Speed	Approx. 3 Seconds Per Page
Fax Modem Speed	Up to 33.6 Kbps
Memory	100 Jobs (with HDD), 2,000 Destinations Max.
Transmission	400 Destinations/Job
Scan Speed	0.7 Seconds Per Page, Maximum 73 IPM

Toshiba Tec Canada Business Solutions Inc.

75 Tiverton Court, Markham, ON L3R 4M8
 Phone: 905-470-3500 | Fax: 905-470-3450
 info@toshibatec.ca
 toshibatec.ca

TOSHIBA